


The AW-D135C conventional manual call point is designed to be use with an intelligent two-wire control system. If it is pressed after a fire is manually confirmed, an alarm signal may be sent to a fire alarm control system which will, after receiving the alarm signal, display the equipment status of the manual call points. When the manual call point is operating normally, the red indicator will blink; when there is a fire alarm, it will remain lit.



### Features

- ✓ Semi-flush or surface mounting
- ✓ Simple key to reset operating element (no broken glass)
- ✓ LED indicator
- ✓ Complete functional test with every activation
- ✓ Meets all requirements of latest EN54 part 11

### Installation

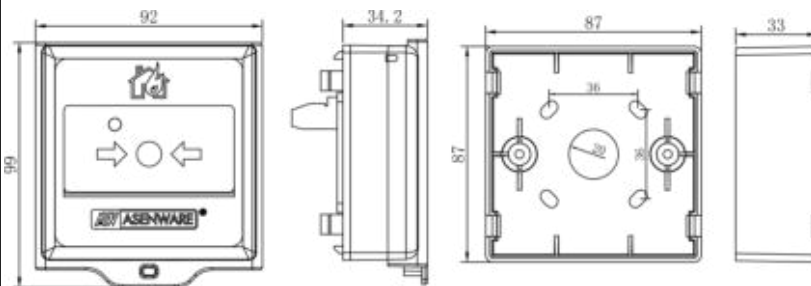

## Technical Specification

|                      |                                                                                                                                   |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Model                | AW-D135C                                                                                                                          |
| Main Voltage         | Zone 24V or 12V                                                                                                                   |
| Operating current    | monitoring status $\leq 20\mu\text{A}$ , alarm status $\leq 15\text{mA}$                                                          |
| Application          | For indoor use only                                                                                                               |
| Wiring               | The promise of two bus system(Zone +, Zone -)                                                                                     |
| Protection class     | IP30                                                                                                                              |
| Indicator            | Red alarm indicator flashes when it is under normal condition, press the manual button lit work                                   |
| Environmental        | Class A temperature range: $-5$ to $40^{\circ}\text{C}$ ( $23\sim 104^{\circ}\text{F}$ )<br>Humidity: 5 to 95% RH, non-condensing |
| Materials and colors | ABS, red                                                                                                                          |
| Mating Panel         | AW-CFP2166 fire alarm control panel                                                                                               |
| Size                 | 99mm* 92mm* 66mm(with cover)                                                                                                      |
| Weight               | about 95g                                                                                                                         |