


Description

AW-D121C Power Supply is used with AW-CFP2166 series conventional fire alarm control panel. It is mainly used to increase the load capacity of the panel. And it can reset the output of 24VDC by 3 inputs (voltage free input, voltage input and RS485).

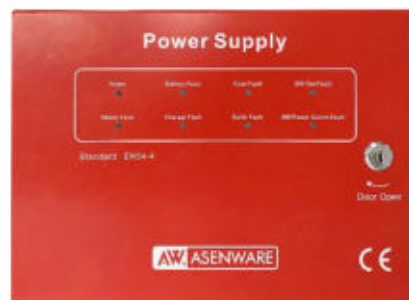

Features

- ✓ Surface mounting
- ✓ Working status indicators
- ✓ 24VDC output short circuit protection function
- ✓ Selectable input modes to reset 24VDC out
- ✓ Compatible with the latest EN54-4 standard

Product Diagram

Mains input voltage	85V~264VAC
Standby power supply with Lead-acid battery	12V/2.3Ah * 2
Operating temperature	-10℃~50℃ Relative humidity: ≤95%(non-condensing)
Resettable output	24VDC, 20V~28VDC with 3A limiting protection
Capacity of the fault output relay contact	1A@30VDC
Voltage input reset port	18VDC~30VDC
Protection class	IP30
Application	For indoor use only
Materials and color	SPCC, red
Size	316mm*225mm*91mm