

When a fire alarm or fault occurs in the fire alarm system, the 4G GSM module AW-FP100GSM-4G will send this information to the designated person's mobile phone via SMS.


The GSM module can be connected with Asenware fire alarm control panel, conventional repeater and AW-GSM200 module.



Features

- ✓ Support 4G network
- ✓ Use Nano SIM Card
- ✓ Use PDU format to send SMS, support multiple languages
- ✓ Use Qualcomm kernel, can be used in most parts of the world

Installation

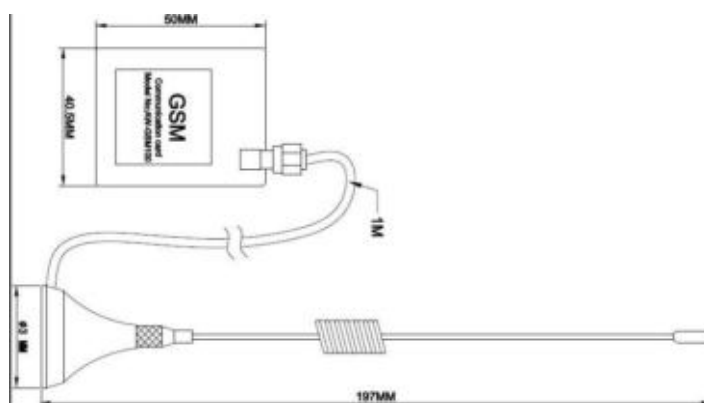

Technical Specification

Model	AW-FP100GSM-4G
Main Voltage	5VDC
Operating Current(@ sleep mode)	≤5mA
GSM Frequency	850MHz/900MHz/1800MHz/1900MHz
Antenna bandwidth	0.8GHz-3GHz
Antenna gain	6 dBi
Antenna length	200 mm
Feed line length	1.0 m
Environmental	Temperature range: -5 to 40°C Humidity: 5 to 95% RH, non-condensing
Size(L*W)	50mm* 40.5mm