

Description


AW-EV602 Multi-Zone Speaker Selector used for AW-EV500 extending zones, and can also be used to expand power with external power amplifiers. Each zone has independent control buttons and indicator lights for easy operation.



Features

- ✓ 5 zone control boards, 50 speaker zones in total
- ✓ Can be used to expand power through external power amplifiers
- ✓ Each zone board has 10 speaker zones, 1 audio input and 1 audio output.
- ✓ Indicators for each zone board: 1 power indicator, 10 activation indicators, 10 isolation indicators.
- ✓ 2 wires RS485 bus system Communication protocol

Dimensions (mm)

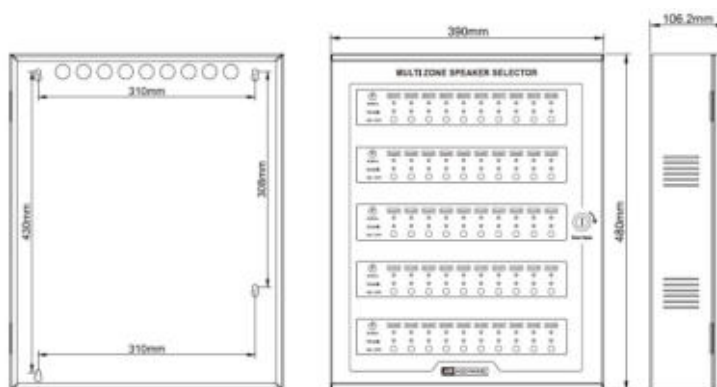

Technical Specification

Model	AW-EV602
Main Voltage	~100VAC~ 260VAC ,50/60Hz
Batteries	2*12V/ 2.3Ah sealed lead acid gel, self-regulated
Battery low-voltage protection	21V
Communication protocol	2 wires RS485 bus system
Size	390*480*106.2mm
weight	About 9kg
Environmental	Class A temperature range: -5 to 40°C (23~104°F) Humidity: 5 to 95% RH, non-condensing
Fuse for AC Power	1 A/ 250V glass tube fuse slow blow 5 X 20mm
Fuse for DC Power	1 A/ 250V glass tube fuse slow blow 5 X 20mm