

Description


The ten zone speaker selector which need to be equipped with the Emergency Voice Evacuation Controller, is used to output the 10 audio sources



Features

- ✓ zone control boards, 10 speaker zones in total, used for extending zones, and can also be used to expand power with external power amplifiers. Each speaker zone has an independent isolating switch
- ✓ Indicators for each zone board: 1 power indicator, 10 activation switches, 10 isolation indicators

Dimensions (mm)

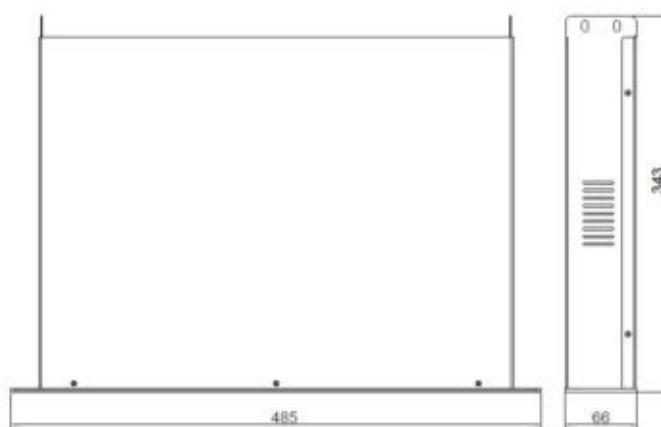

Technical Specification

Model	AW-EV603
Rated input voltage	~100VAC~ 260VAC ,50/60Hz
Work Temperature	-10 °C ~50 °C
Work Humidity	≤95% RH
DC Input Voltage and Current	24V DC±10%/1A
Speaker Output :	10 Zones
Amplifier Input:	1 Channel
Dimension (L x W x D)	485*66*343
weight	About 4kg